
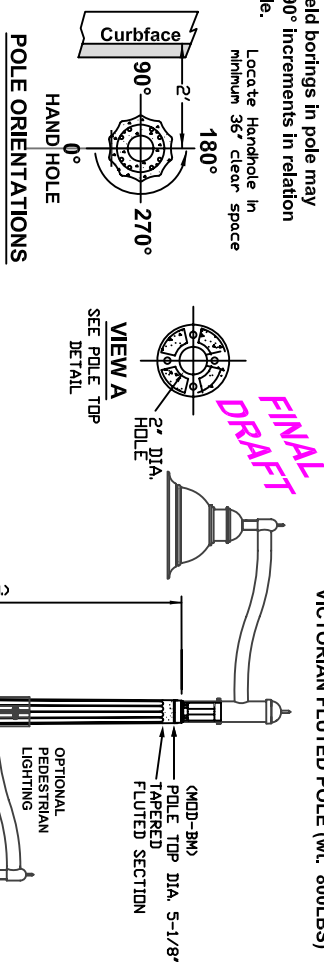


- 1) Install ground rod in pull box.
- 2) Maximum 2 conduits per fixture. 3 conduits require adjacent pull box.
- 3) Dissimilar metals separated dielectrically.
- 4) All bolts, nuts, washers, and hardware shall be galvanized steel.


Locate Handhole in
minimum 36" clear space

VICTORIAN FLUTED POLE (wt. 800LBS)


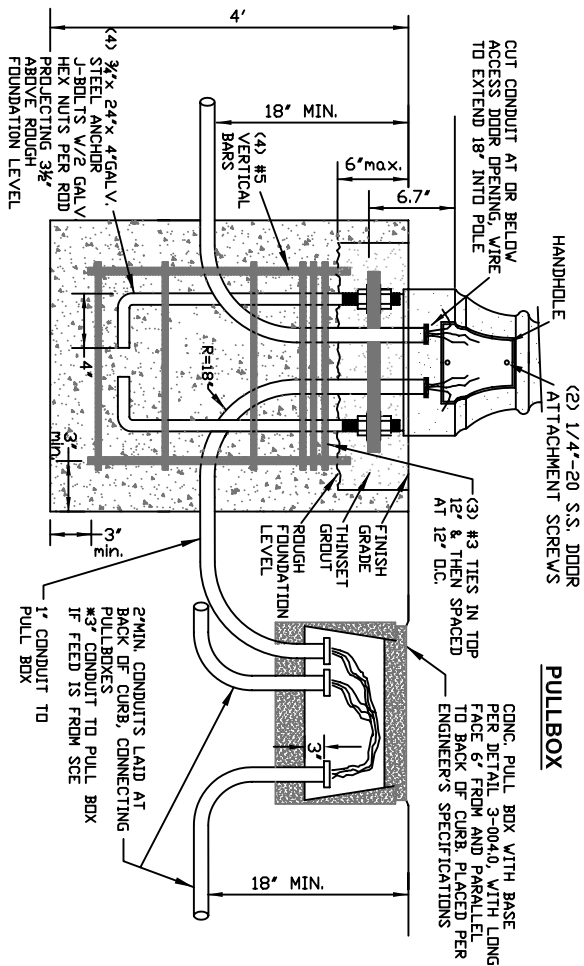


N.T.S.

CONCRETE FOUNDATION, CLASS 560-C-3250 WITH (4) #5 VERTICAL BARS 48" LONG ON A $\phi 28"$ WITH #3 TIES AS SHOWN IN SETUP DETAIL

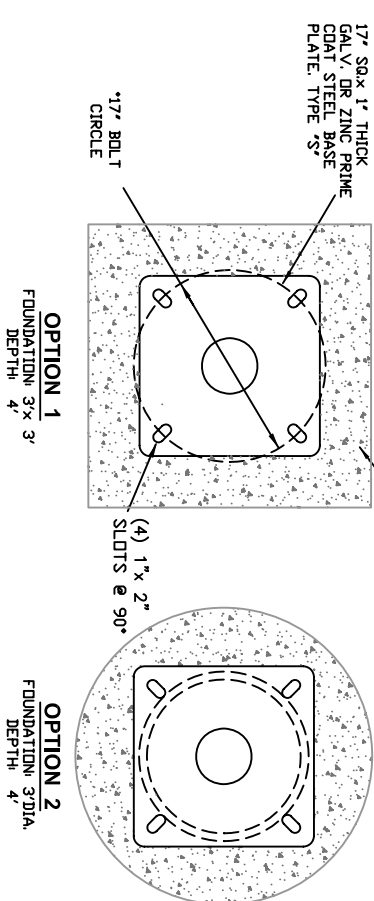

POLE TOP DETAIL

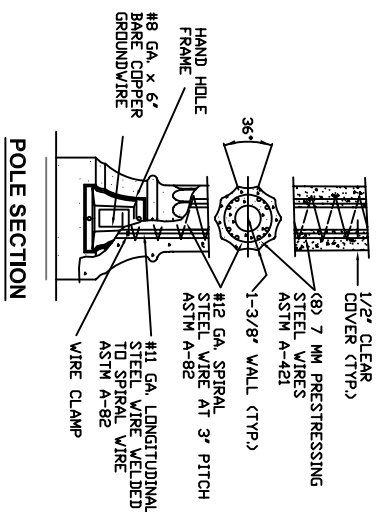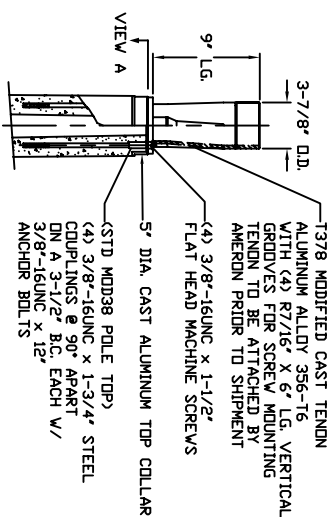

POLE SECTION

- NOTES:**
1. Contact: Pacific Lighting Sales Inc. 2366 Birtcher Drive, Suite 100 Lake Forest, CA 92630, (949) 597-1633, <http://www.pls-inc.com>
 2. Order: Pole **VBFP06.25PL**, Victorian Fluted Pole, **Pole Mix (2P3S)** Santa Barbara Black & White exposed aggregate finish, with flat water sealer coating - ASTM C-150 TYPE III gray cement.
 3. Specify Tamper Proof Door Screws.
 4. Baseplate is included.
 5. (4) $\frac{3}{4}$ "x24"x4" galvanized steel bolts & hardware included.

REVISED	DATE	APPROVED	CITY OF SANTA BARBARA – PUBLIC WORKS DEPARTMENT	STANDARD DETAIL
	JAN07		POLE STANDARD: TYPE B-08	3-002.0-08
			STREET LIGHT POLE	
		PUBLIC WORKS DIRECTOR		
		DATE		